



06 Downlights Fixed LED>The Frameless IP65 Range Die cast + PC

10108CF/C



8W LED frameless downlight, IP65. Suitable for Indoor/Outdoor installation and bathroom.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

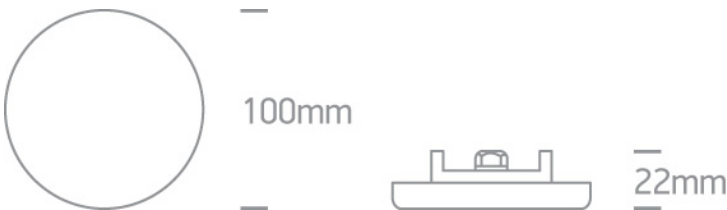

Gallery



Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Frameless IP65 Range Die cast + PC
Order Code	10108CF/C
Colour	White
Material	Die Cast
Diffuser Material	PC
Shape	Circular

Height	22mm
Diameter	100mm
Cutout Hole Diameter	80mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	11,5V
Safety Class	
Power(Watts)	6W
IP Rating	IP65

Light Source
LED Type
LED Brand
F Mark

LED built in
SMD 4014
Zhaochi


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
500mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
220-240V
Yes
Yes
5,5-9W
0,9
Yes
11-18V
IP20

No
Plastic
Cable
Kegu

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
550lm
68,75lm/W
80
120°


Packing Info

Box Length	15,5cm
Box Width	15,5cm
Box Height	3cm
Box Weight	0,26Kg
Pcs/Carton	40
Carton Length	33cm
Carton Width	32cm
Carton Height	35cm
Carton Weight	10,6Kg
Barcode	5291889057093
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

