



14 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

67376A/W/W



2x6W, IP54,SMD 2835, Outdoor Slim Range Up & down beam.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

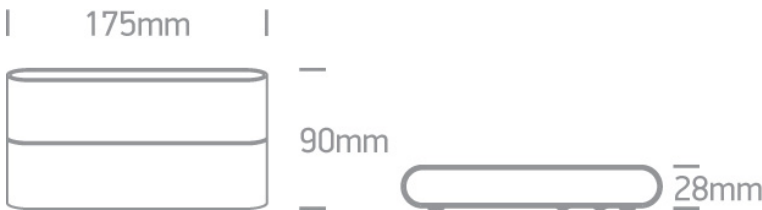

Physical Specification

Item Group
Family
Order Code
Colour
Material
Shape
Length
Width
Height
Surface Wall
Indoor
Outdoor

14 Wall & Ceiling LED
Outdoor Slim Range Up & down beam
67376A/W/W
White
Die Cast
Rectangular
175mm
90mm
28mm
Yes
Yes
Yes

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x6W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	16V
Power(Watts)	5,6W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Edison

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,9-6,1W
Power Factor	0,5

Constant Current
350mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand

Yes
8,5-17,5V
IP20

No
50°C
75°C
Plastic
Cable
Eaglerise

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram


3000K
2x420lm
70lm/W
80


Packing Info

Barcode
HS Code

5291889043645
9405409900

Energy Label

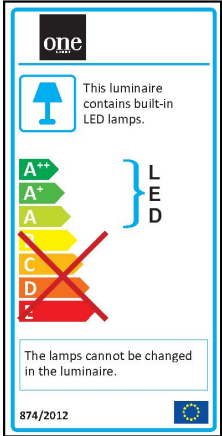

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

