


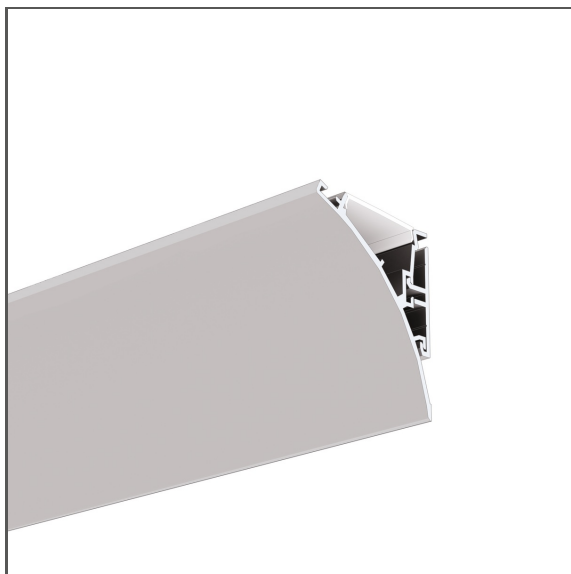

- Hidden light source
- Easy maintenance

APPLICATION

- decorative lighting

MONTAGE

- to the surface, using properly selected screws and a dedicated mounting track
- can be easily connected into runs

ADDITIONAL INFORMATION

- mounting strip can be used in sections

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum	Length	Ref
Color	■ silver anodized	1000 mm	18025ANODA_1
With the possibility of sealing up to IP	20	2005 mm	18025ANODA_2
Possible shapes of the luminaire	triangular	3010 mm	18025ANODA_3
LED gluing width A	14 mm		
Number of LED strips A (8 mm wide)	1		
Width	37 mm		
The cover is cut to the length of the profile	yes		
Can be easily connected into runs	yes		
Decorative lighting	yes		
Wire out back of extrusion	yes		

SAMPLE PROJECTS



COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HS-22		PC	73	 frosted	17011
			94	 clear	17022
LIGER-22		PC	62	 frosted	17032V1
			39	 black	17087
MUN-22		PC	86	 semi-transparent	17042

END CAPS

NAME		MATERIAL	COLOR	REF.
WERKIN-P		PP	 gray	24140
WERKIN-L		PP	 gray	24141

LED




8K-WP-K-1220-24V
8K-WP-K-1220-24V



8K-WP-K-1275-12V
8K-WP-K-1275-12V



K-1210-12V
K-1210-12V




K-1210-24V
K-1210-24V



K-1220-12V
K-1220-12V




K-1220-24V
K-1220-24V




K-1275-12V
K-1275-12V




K-1275-24V
K-1275-24V




K-1820-HD-24V
K-1820-HD-24V



K-1910-HD-24V
K-1910-HD-24V



WP-K-1210-12V
WP-K-1210-12V



WP-K-1210-24V
WP-K-1210-24V



WP-K-1220-12V
WP-K-1220-12V



WP-K-1220-24V
WP-K-1220-24V



WP-K-1275-12V
WP-K-1275-12V




WP-K-1275-24V
WP-K-1275-24V



WP-K-1910-HD-IP65-24V
WP-K-1910-HD-IP65-24V



WP-K-1220-IP65-12V
WP-K-1220-IP65-12V



K-HE-0480-HD-24V
K-HE-0480-HD-24V




K-HE-0960-HD-24V
K-HE-0960-HD-24V




K-HE-1440-HD-24V
K-HE-1440-HD-24V



K-HE-1920-HD-24V
K-HE-1920-HD-24V



K-LR-1000-24V
K-LR-1000-24V




WP-K-CR-1210-24V
WP-K-CR-1210-24V



WP-K-CR-1220-24V
WP-K-CR-1220-24V



WP-K-CR-1275-24V
WP-K-CR-1275-24V




K-CR-1210-24V
K-CR-1210-24V



K-CR-1220-24V
K-CR-1220-24V




K-CR-1275-24V
K-CR-1275-24V




K-CR-1820-HD-24V
K-CR-1820-HD-24V



K-CR-1910-HD-24V
K-CR-1910-HD-24V



K-1275-RGB-12V
K-1275-RGB-12V



K-1275-RGB-24V
K-1275-RGB-24V




K-1530-RGB+W-24V
K-1530-RGB+W-24V



K-1920-120-RGB-24V
K-1920-120-RGB-24V




WP-K-1920-120-RGB-24V
WP-K-1920-120-RGB-24V



WP-K-27/65-1920-24V
WP-K-27/65-1920-24V




K-22/50-1728-24V
K-22/50-1728-24V



K-30/18-1770-24V
K-30/18-1770-24V

OTHER ACCESSORIES



SPRING
BLOK
42731V1



CONNECTOR
ZM-NA-180
42724



GLAND
6x1,2
00802



MASKING COVER
MP-22
17167, 17167L9010,
17167L9005