


Profile STEPUS

Ref. 18038

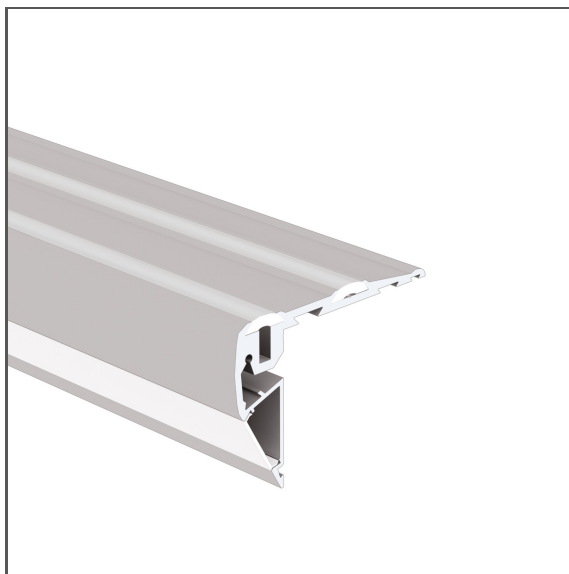

- For installation on the steps
- Conforms to the American ADA norms
- Non-slip elements
- Two lighting options
- High mechanical resistance


APPLICATION

- warning lighting and anti-slip protection on the steps

MONTAGE

- to a step, using properly selected screws

TECHNICAL DRAWING

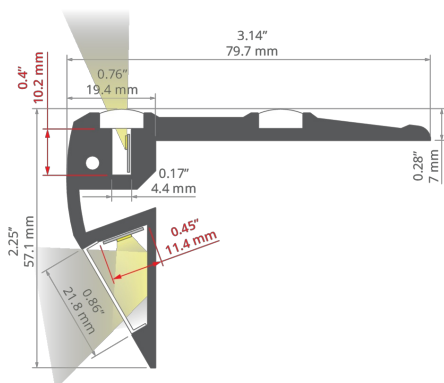

TECHNICAL SPECIFICATIONS









Material	aluminum	Color	Length	Ref
With the possibility of sealing up to IP	20, 67	■ silver anodized	1000 mm	18038ANODA_1
LED gluing width A	10 mm		2005 mm	18038ANODA_2
LED gluing width B	11 mm		3010 mm	18038ANODA_3
Number of LED strips A (8 mm wide)	1	■ black anodized	1000 mm	18038K7_1
Width	79.7 mm		2005 mm	18038K7_2
The cover is cut to the length of the profile	yes		3010 mm	18038K7_3
Wire out back of extrusion	yes			

Profile STEPUS

Ref. 18038

KLUŚ Inspiring
Solutions






SAMPLE PROJECTS

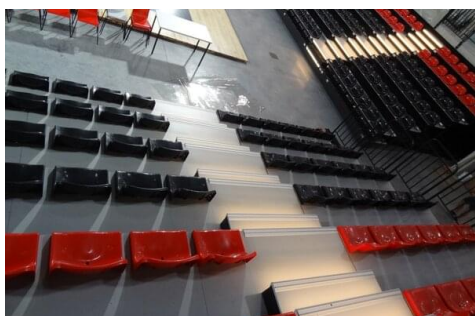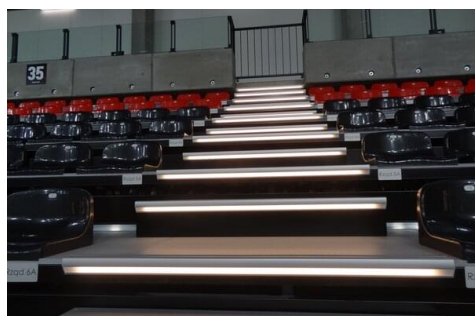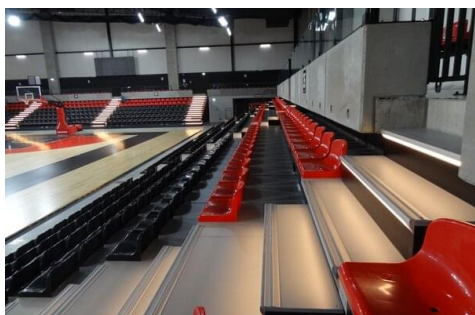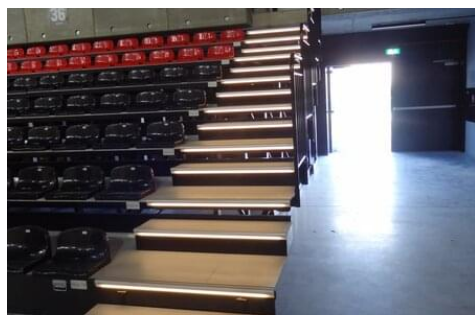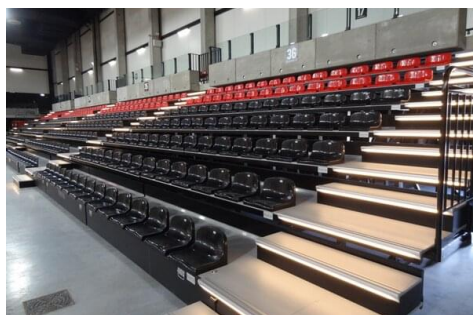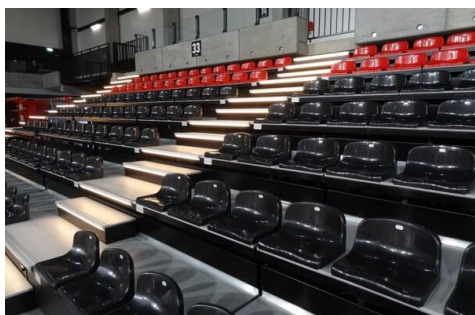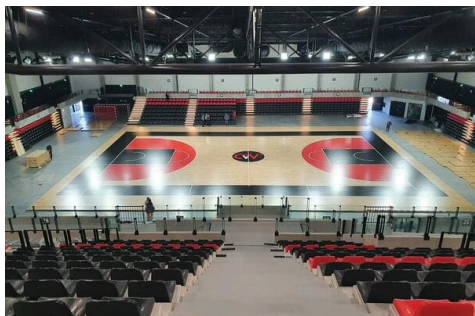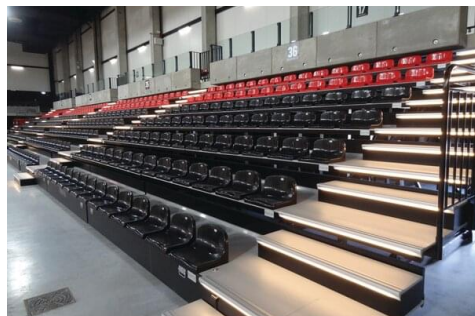

Profile STEPUS

Ref. 18038

KLUŚ Inspiring
Solutions

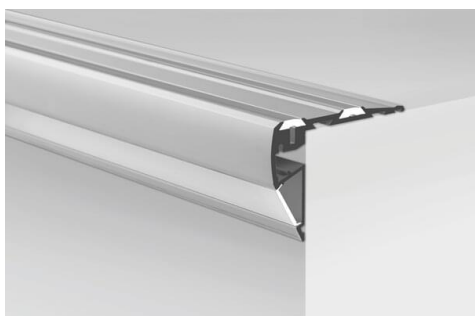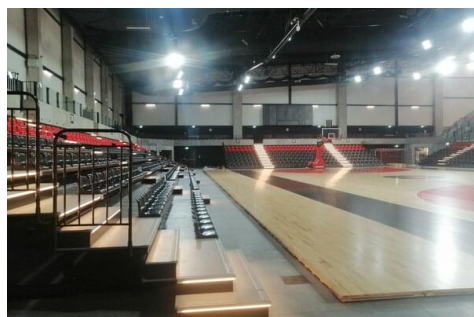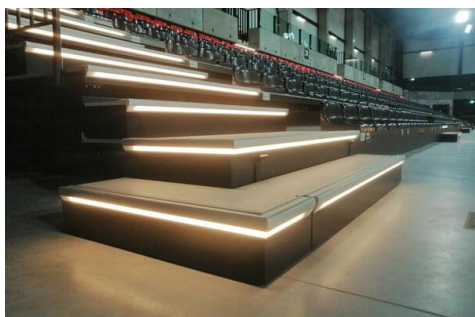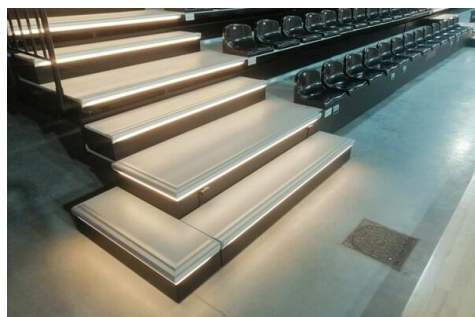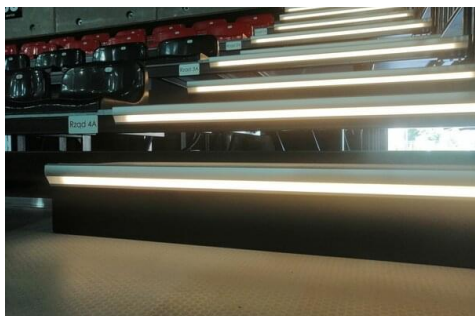


COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HS-22		PC	73	☐ frosted	17011
			94	☒ clear	17022
LIGER-22		PC	62	☐ frosted	17032V1
			39	☒ black	17087
MUN-22		PC	86	☐ semi-transparent	17042


END CAPS

NAME		MATERIAL	COLOR	REF.
STEPUS-L		PP	gray	24229
			black	24317
STEPUS-P		PP	gray	24230
			black	24318


LED




K-HE-0480-HD-24V
K-HE-0480-HD-24V

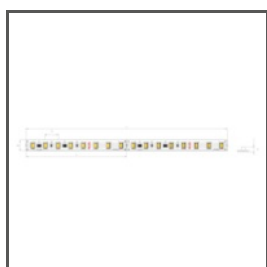

K-HE-0960-HD-24V
K-HE-0960-HD-24V




K-HE-1440-HD-24V
K-HE-1440-HD-24V



K-HE-1920-HD-24V
K-HE-1920-HD-24V



K-SE-1210-8-24V
K-SE-1210-8-24V

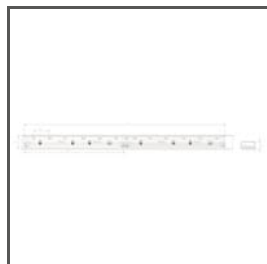

WP-K-SE-1210-8-24V
WP-K-SE-1210-8-24V

OTHER ACCESSORIES



ANTI-SLIP RUBBER STRIP
14
17001



GLAND
6,4x3
42264



TOOL
00023



MASKING COVER
MP-22
17167, 17167L9010,
17167L9005