



New 2023 Edition 4>Industrial & Floodlights

63240NL/C



240W SMD LED DALI Industrial High Bay, IP65.

Supplied with DALI 2 driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

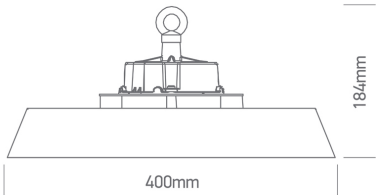

Physical Specification

Item Group
Family
Order Code
Colour
Material
Diffuser Material
Shape
Height
Diameter
Suspended Ceiling
Indoor
Outdoor

New 2023 Edition 4
Industrial & Floodlights
63240NL/C
Black
Aluminium
PC
Circular
184mm
400mm
Yes
Yes
Yes

Adjustable	No
------------	----

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	240W
IP Rating	IP65
Light Source	LED built in
Dimmable	Yes
Dimmer type	Dali
Cable Length	150cm
F Mark	

Fitting	
Input Type	Constant Current
Light Source	LED built in
LED Type	SMD 2835

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power Factor	0,9
Constant Current	Yes
IP Rating	IP65

Safety Class	
Brand	Lifud
Illumination Data	
Colour Temperature	4000K-4700K-5700K
Lumen Output	36000lm
Light Efficiency	150lm/W
CRI	80
Beam Angle	90°
Illumination Diagram	
Packing Info	
Pcs/Carton	1
Barcode	5291889078388
HS Code	9405413990
Certification & Warranty	
Warranty	5 years
Weee Directive	Yes

switch to
one light!

one
LIGHT

